


Plastic louvre shutters

- Automatic plastic louvre shutter with self adjusting flaps
- Manufactured with high standard ecologically friendly plastic material
- Streamlined shape and durability
- Outdoor weather resistant and UV stabilised
- Suitable for an operating temperature range of -30°C to +70°C
- Each louvre shutter is individually carton packed
- Set of four fastening screws included
- WSK50 and below are not the split configuration shown
- Individual louvre blades can be supplied in 4m length



Fan dia mm	Shutter Type mm	D mm	H/B mm	LA (hole centres) mm	T mm
250	WSK25	○ 260	294	232	26
315	WSK30	○ 310	347	276	26
350	WSK35	○ 360	397	310	26
400	WSK40	○ 420	459	364	26
450	WSK45	○ 460	501	395	31
500	WSK50	○ 510	549	445	31
630	WSK65	□ 555	696	626	31
710	WSK71	□ 720	760	692	40
800	WSK80	□ 800	840	772	40
1000	WSK100	□ 1000	1040	972	40

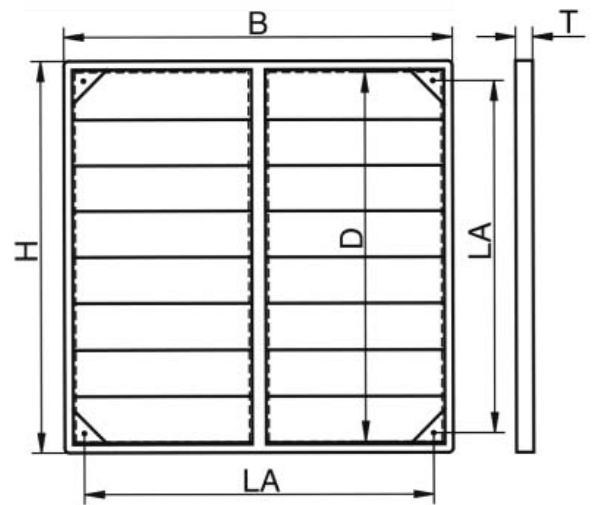

Side wall air inlet

The LEP air inlet grille features a counterbalanced flap which opens on proportion to increased air speed but minimised draughts. The extended shape at the bottom of the grille deflects the air upward as it enters the building to mix with the warmer air inside, reducing the dumping of cold air onto the livestock.

The system is manufactured from UV stabilised ecologically friendly plastic suitable for temperature range -30°C to +70°C.



Dimensions mm	L mm	RL mm	H mm	RH mm	T mm	T1 mm
Type LEP 100 / D	1070	1020	170	125	60	24
Type LEP	570	505	190	125	68	32

