


# **AMENTA 1.5 42-830 ETD LV (3000k) & 1.5 42840 ETD LV (4000k)**



|                                     |                         |
|-------------------------------------|-------------------------|
| TK                                  | 10252382                |
| Dimensions (mm)                     | 1.541 x 76 x 67 mm      |
| Weight (kg)                         | 2,0                     |
| Power (W)                           | 35                      |
| Luminous flux (lm)                  | 4.200                   |
| Colour                              | 3000k (830) 4000k (840) |
| CRI                                 | 80                      |
| Voltage                             | 220..240                |
| Frequency                           | 0..50/60                |
| Protection class                    | I                       |
| Ballast controls                    | ETD (0-10 V)            |
| Connection                          | 2x Terminal             |
| IP protection                       | IP 66                   |
| IK protection                       | IK 03                   |
| Material                            | PMMA, ASA               |
| End cap colour                      | Red                     |
| Service life, L80 (25 °C) (h)       | 50.000                  |
| Min. / Max. ambient temp.           | -15 ... +25             |
| Fire protection, UL94               | HB                      |
| Fire protection, EN 60595-2-11 (°C) | 650                     |

**[www.epaproducts.co.uk](http://www.epaproducts.co.uk)**

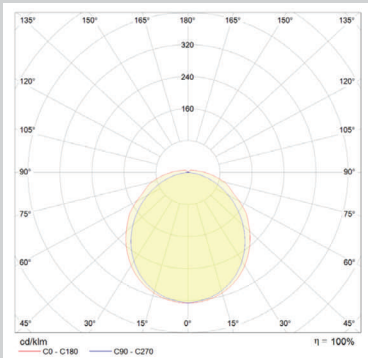