


ALTUMA MXB 65-930 ETDD RubiLux



TK	10228098
Dimensions (mm)	1.340 x 112 x 122 mm
Weight (kg)	6,2
Power (W)	44 / 19 W
Luminous flux (lm)	5.600 / 410
Colour	4.000 K / 620 - 645 nm
CRI	80 / N.A:
Voltage	220..240
Frequency	0..50/60
Protection class	I
Ballast controls	ETDD (DALI DT6)
Connection	3m, NYY 1.5 mm ²
IP protection	IP 69-K
IK protection	IK 10
Material	PMMA, ASA
End cap colour	Red
Service life, L80 (25 °C) (h)	100.000
Min. / Max. ambient temp.	-25 ... +35
Fire protection, UL94	HB
Fire protection, EN 60595-2-11 (°C)	650

www.epaproducts.co.uk

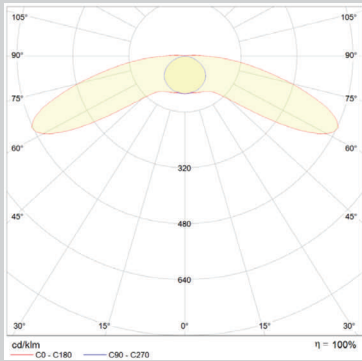